



Commercial

CASCADE 2

Climate control with
the flexibility



ActronAir

ActronAir. Because Australia needs Australian air conditioning.

CASCADE 2

The year 1984 saw Advance Australia Fair become our National Anthem, the 1 dollar coin come into circulation and a small family air conditioning business open its doors. Today, ActronAir is a proud Australian company recognised for making world-class air conditioners. Well, it stands to reason. The team at ActronAir experience the harsh Australian conditions first hand, and our climate places demands on air conditioning not found in other parts of the world.

And that's why ActronAir's engineers have developed the most advanced air conditioning systems specifically for the unique and harsh Australian environment.

Engineered with a superior operating range from -20°C to 50°C, and a host of innovative features, ActronAir's Cascade cassette system is engineered to withstand the most extreme conditions Australia can throw at it.

The Cascade cassette system – style that's through the roof

A perfect fit for suspended or 'floating' ceilings, the ceiling mounted Cascade cassette system covers a wide range of applications, such as residential, retail and commercial spaces.

The Cascade has many state-of-the-art features, including 360° airflow, which delivers air from not only all four sides but from all four corners as well. It's also stylishly attractive, with a discrete design that complements any surrounding.




**More than
a quarter of a
million Aussies
take comfort in
ActronAir**



A superior operating range suited for Australia

Most overseas air conditioners are only designed with a maximum temperature range of 43°C to 46°C. The Cascade cassette system operates up to 50°C. Big deal? Well yes.

The temperature around the outdoor unit can reach far higher than what they're saying on the weather report due to direct sun or heat radiating off the ground. They're often located against a wall or fence where there's low air circulation.

“ Nothing beats performing under extremes. Engineered for Australia, you can trust ActronAir to be there when you need it most. ”

Mark 'Frosty' Winterbottom
V8 Supercars Champion & ActronAir Brand Ambassador

Pick up where you left off

Auto-restart

Blackout? No problem. Cascade's auto-restart function means it restarts automatically in its last programmed setting once power is restored, which means you don't have to spend unnecessary time reprogramming your system.

Strikingly simple

Digital display and external on/off button

With an external digital display, temperature settings and error codes can be read with ease. The Cascade cassette system also features an easy to access on/off switch, for added convenience.

Stylish, space saving convenience

Strength with subtlety

Aesthetically pleasing and unobtrusive, Cascade sits well out of the way, providing maximum comfort without attracting attention.

Installation Flexibility

Air range capability

Cascade Series 2 broadens the application range with its capability of being applied to high ceiling applications (up to 4m), along with having the ability to have up to 5m horizontal air distribution, making it an ideal solution for office fit outs, commercial tenancies or large common areas.



Here for the long haul

Protect your investment

ActronAir now uses gold fin epoxy coated protection on both indoor and outdoor coils as standard. This is to further reduce corrosion from the harsh Australian conditions, as well as assisting the defrosting process, thus improving heating efficiency.

Comfort the way you want it

Comfort from every angle

Cascade delivers 360° airflow from not only its four sides, but also from its four corners. Encompassing independent vane control, cascade cassette 2 provides you greater flexibility to set different angles in each direction thus allowing you to customise airflow depending on where you need it the most.

All-encompassing efficiency

The centre of comfort

The Cascade cassette system is well suited to a centralised home or workspace, where it effectively heats or cools a large common area.

Maintenance made easy

The extras count

- Built-in drain pump with impressive 1000mm lift
- New innovative Windtrack design incorporated allowing for quick water pump maintenance
- Pump positioned outside the air channel allowing for easier access




Better control on the wall...

The Cascade cassette system is designed for ultimate ease of operation, with a wall mounted wired controller as standard that delivers precise temperature control.



...and the remote possibilities

With the added convenience of an optional remote control, Cascade gives you the ultimate in control and convenience.

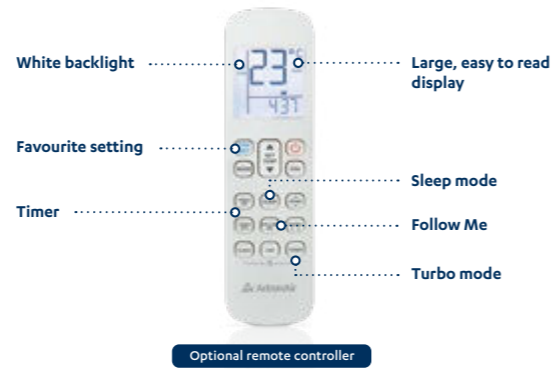

Set your comfort remotely

The optional EasyConnect upgrade allows you to control your Cascade cassette system wirelessly via your smart device. Start the day in comfort, turn on your office air conditioning system before you leave home for work, it's all in the palm of your hand.



Works with Google Home & Amazon Alexa

Experience the ultimate in-home automation with Actron Easy Connect* and the seamless integration of Google Home or Amazon Alexa. With hands-free voice control, you can adjust your air conditioning system with ease, from anywhere in your home.

"Alexa, set <device> to cool"
 "Alexa, set <device> to 22°C"
 "Alexa, what is the temperature on <device>"



* To use the Easy Connect app, it is necessary to download the Easy Connect app and pair it with the WC-03 Wired Controller. The Easy Connect app can be downloaded from either the Apple Store or Google Play. If using a WC-02 Wired Controller or the Wireless controller, a Wi-Fi Kit will need to be purchased and paired to the Easy Connect App. Google Home and Alexa devices are not sold by ActronAir.

Better Comfort

Multiple choice solutions

Even when you have limited roof access, the Cascade cassette system delivers maximum comfort and control throughout a large area and allows you multiple choices for setting and maintaining your ideal temperature. The unit can automatically switch between heating and cooling modes, and also gradually dehumidifies the room (in cooling mode) to create even greater comfort.

Follow me for a more attuned temperature

In most air conditioners, the temperature sensor is in the indoor unit. With Cascade, we have put additional sensors inside the remote controller and wired wall controller. With the remote controller, when you press the Follow Me button you'll have the temperature you want, wherever you are in the room. When it comes to the wired wall controller, you'll have more precise temperature control and comfort at its location.



Extended Comfort


Even in spaces with high ceilings, a comfortable airflow is carried down to the floor level. When all round flow is selected, ceilings of up to 4.0m in height can be accommodated.



Better Flexibility & Maintenance

Cascade cassette II is equipped with a built-in drain pump with a pressure lift of up to 1000mm, increasing flexibility and installation speed.

A NEW "Windtrack" design has also been incorporated allowing quicker water pump maintenance. The water pump is positioned outside the air channel which allows for easy access and reducing maintenance time.

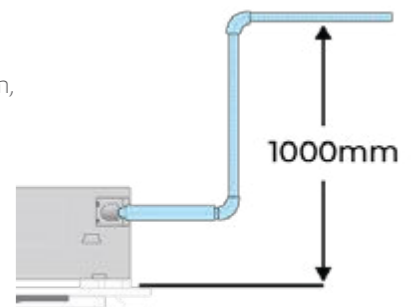

Better Engineered

AC vs DC for rockin' efficiency and performance

The Cascade cassette system uses ultra-energy-efficient DC, or direct current inverter technology in its inverter compressor, indoor fan and outdoor fans. Some companies use less efficient AC technology, or combinations of both. This can make a significant difference to your electricity bill.


With an impressive 25 frequency stages, our inverter compressor is up to 35% more efficient than AC technology, while our upgraded DC outdoor fan with five speed settings is up to 40% more efficient. The result is improved efficiencies overall, as well as optimal cooling performance.



Engineered with you in mind

Flexible Installation

When it comes to installation, Cascade 2 gives you multiple options to suit a wide range of room layouts. Some of these features include optional supply duct outlets, outside air intake, independent vane control.

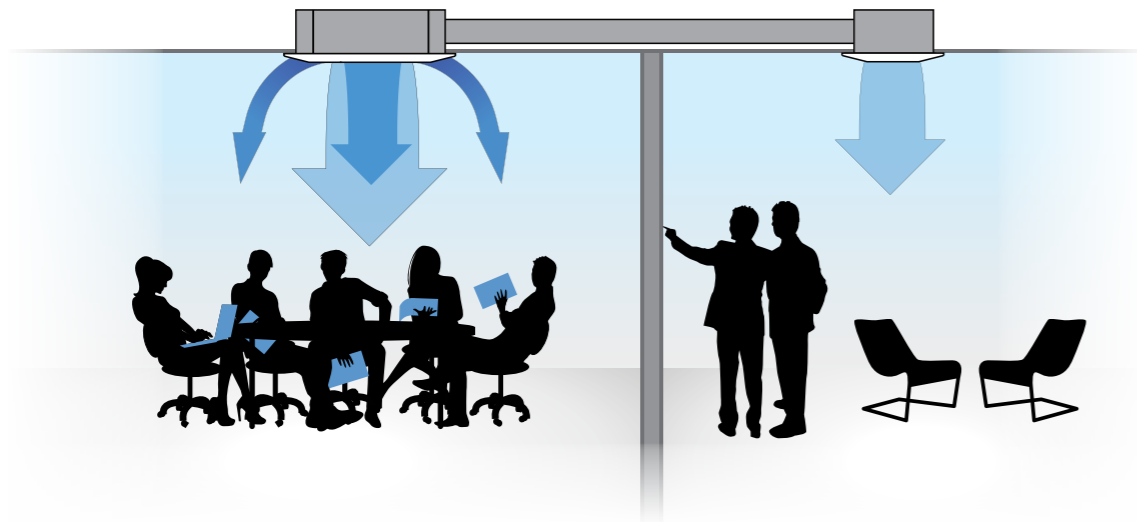

Better Design

It looks as good as it feels

The ActronAir Cascade blends in perfectly with your interior design like part of the furniture. In fact you'll notice it no more than a stylish light fitting.



Better Service

Local service you can count on

Our National Service Network has service staff on the ground and parts on the shelves. They're friendly, reliable and prompt. Furthermore, ActronAir's 5 year warranty will keep you comfortable with absolute peace of mind.



Cassette System Series 2 10.95-13.95kW (Single Phase)

| Technical Information | | | | |
|--|----------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| OUTDOOR MODEL | | CRC-100CS | URC-125CS | URC-140CS |
| INDOOR MODEL | | CRE-100CS | CRE-125CS | CRE-140CS |
| Nett (Rated) Capacity (kW) (AS/NZS3823.1.1) | Cooling (min - max) | 10.95 (3.60 - 16.00) | 12.30 (3.60 - 16.00) | 13.95 (3.60 - 16.00) |
| | Heating (min - max) | 11.95 (2.75 - 17.30) | 13.50 (2.75 - 17.30) | 14.50 (2.75 - 17.30) |
| Input Power (kW) (AS/NZS3823.1.1) | Cooling Rated | 2.58 | 3.25 | 4.08 |
| | Heating Rated | 2.84 | 3.46 | 4.41 |
| ¹ EER Rated (AS/NZS3823.1.1) | Cooling | 4.24 | 3.78 | 3.37 |
| ² COP Rated (AS/NZS3823.1.1) | Heating | 4.21 | 3.90 | 3.47 |
| Star Rating (AS/NZS3823.1.1) | Cooling | 5 ★ / 4 ★ / 4.5 ★ | 4.5 ★ / 4 ★ / 4 ★ | 4 ★ / 3.5 ★ / 4 ★ |
| | Heating | 3.5 ★ / 3 ★ / 2.5 ★ | 3.5 ★ / 2.5 ★ / 2 ★ | 3 ★ / 2.5 ★ / 2 ★ |
| Seasonal Performance Factor Residential | TCSPF (Hot / Mixed / Cold) | 6.76 / 5.92 / 6.10 | 6.31 / 5.57 / 5.80 | 5.94 / 5.36 / 5.66 |
| | HSPF (Hot / Mixed / Cold) | 5.34 / 4.62 / 4.15 | 5.25 / 4.24 / 3.88 | 4.95 / 4.26 / 3.77 |
| Power Supply - (V / Ph / Hz) | Outdoor | 220 - 240 V / 1PH+N / 50Hz | | |
| Rated Load Amps (AS/NZS3823.1.1) | Cooling | 11.7 | 14.8 | 18.0 |
| | Heating | 12.2 | 15.0 | 16.7 |
| Full Load Amps (AS/NZS3823.1.1) | | 31.0 | 31.0 | 31.0 |
| Circuit Breaker Amps | | 32.0 | 32.0 | 32.0 |
| ³ Suggested Minimum Mains Cable Size | | 6.0mm ² | 6.0mm ² | 6.0mm ² |
| ³ Suggested Minimum Indoor to Outdoor Power Cable Size & Type | | 1.0mm ² 2 Core + Earth | 1.0mm ² 2 Core + Earth | 1.0mm ² 2 Core + Earth |
| IP Rating | Outdoor | IPX4 | | |
| | Indoor | IPX0 | | |
| Compressor Type | | Inverter Twin-Rotary | | |
| Refrigerant | | R-32 | | |
| Airflow Range Indoor (l/s) | High | 505 | 505 | 505 |
| | Medium | 459 | 459 | 459 |
| | Low | 350 | 350 | 350 |
| Outdoor Dimensions (mm) | Depth | 415 | 415 | 415 |
| | Height | 1333 | 1333 | 1333 |
| | Width | 952 | 952 | 952 |
| Indoor Dimensions (mm) | Depth | 830 | 830 | 830 |
| | Height | 287 | 287 | 287 |
| | Width | 830 | 830 | 830 |
| Indoor Panel Dimensions (mm) | Depth | 950 | 950 | 950 |
| | Height | 55 | 55 | 55 |
| | Width | 950 | 950 | 950 |
| ⁴ Nominal Weight (kgs) | Outdoor | 95.1 | 95.1 | 95.1 |
| | Indoor | 35.3 | 35.3 | 35.3 |
| Indoor Sound Pressure Level (dBA) (Low / Med / High) | | 54 / 49 / 46 | 54 / 49 / 46 | 54 / 49 / 46 |
| ⁵ Outdoor Sound Pressure Level (dBA) 1m | | 59.9 | 59.9 | 59.9 |
| ⁶ Outdoor Sound Power Level (dBA) | | 71 | 71 | 71 |
| Outdoor Operating Range (°C) | Cooling | 0°C to 50°C | | |
| | Heating | -20°C to 24°C | | |
| MEPS Compliant | | Yes | Yes | Yes |

Foot Notes 1-7

- EER Rated = Energy Efficiency Ratio (Rated Capacity Cooling, Rated Input Power Cooling)
- COP Rated = Coefficient of Performance (Rated Capacity Heating, Rated Power Heating)
- Refer to AS/NZS 3000 'Australian/New Zealand Wiring Rules' for more details.
- Refer to Catalogue Unit Weight Distribution Guide section for details of weight points.
- Sound Pressure Level at 1m distance is determined as the measured sound pressure at 1m perpendicular to the coil side of the condenser.
- Determination of Sound Power Levels of Noise Sources, AS1272 - Precision Methods for Broad-Band Sources in Reverberation Rooms.
- When Demand Response capability option is chosen, the air conditioner will be fully compliant with AS4755.3 in the following modes: DRM 1, 2, 3

Important Notes:

- The Local Electricity Supply Authority may require limits on - starting current, running current and voltage drop, please check prior to purchase.
- When the outdoor temperature exceeds the rated conditions, the cooling/heating capacities may decrease the rated nett values.
- Specifications subject to change without notice.

Rated Conditions:

Cooling: 35°C DB Outdoor / Air Entering Indoor 27°C DB, 19°C WB
 Heating: 7°C DB, 6°C WB Outdoor / Air Entering Indoor 20°C DB

Warranty:

For full terms and conditions of ActronAir warranty, please refer to warranty terms document - www.actronair.com.au

| Features | | | | |
|---------------------------------------|---------|-----------|-----------|-----------|
| OUTDOOR MODEL | | CRC-100CS | URC-125CS | URC-140CS |
| INDOOR MODEL | | CRE-100CS | CRE-125CS | CRE-140CS |
| Wired Controller | | WC-02 | WC-02 | WC-02 |
| Remote Controller - Optional | | RC-03 | RC-03 | RC-03 |
| Easy Connect Wi-Fi App | | Optional | Optional | Optional |
| Follow Me Function | | Yes | Yes | Yes |
| Sleep | | Yes | Yes | Yes |
| Turbo | | Yes | Yes | Yes |
| Self Clean Operation | | Yes | Yes | Yes |
| Auto Defrost Function | | Yes | Yes | Yes |
| Timer On/Off | | Yes | Yes | Yes |
| 7-Day Scheduler / Weekly timer | | Yes | Yes | Yes |
| Dehumidification | | Yes | Yes | Yes |
| Drain Pump | | Yes | Yes | Yes |
| Hanging Brackets | | Yes | Yes | Yes |
| Elevating Grill - Up to 4m | | No | No | No |
| 360° Airflow | | Yes | Yes | Yes |
| Independent Louvre Control | | Yes | Yes | Yes |
| Supply Duct Outlet | | Optional | Optional | Optional |
| Outside Air Intake | | Optional | Optional | Optional |
| Hydrophilic Aluminium Coil Protection | Indoor | Yes | Yes | Yes |
| | Outdoor | Yes | Yes | Yes |
| Louvre Memory | | Yes | Yes | Yes |
| Demand Response | | Ready | Ready | Ready |
| Indoor Fan Speed | | 5-Speed | 5-Speed | 5-Speed |
| Outdoor Fan Speed | | 5-Speed | 5-Speed | 5-Speed |
| Auto Restart Function | | Yes | Yes | Yes |
| Fault Alarm Output Port | | Yes | Yes | Yes |
| Remote On/Off | | Yes | Yes | Yes |

| Field Piping and Connections | | | | |
|------------------------------|---|---------------------|------------|------------|
| Refrigerant | Factory Charge - (g) | 3600 | 3600 | 3600 |
| | Pre-Charge Length - (m) | 5 | 5 | 5 |
| | Additional Refrigerant Charge - (g/m) | 24 | 24 | 24 |
| | Minimum Field Pipe Length - (m) | 3 | 3 | 3 |
| | Maximum Field Pipe Length - (m) | 75 | 75 | 75 |
| | Maximum Vertical Height Differential (m) included in max length | 30 | 30 | 30 |
| Field Pipe Size | Liquid Pipe - mm (inch) | 9.52 (3/8) | 9.52 (3/8) | 9.52 (3/8) |
| | Gas Pipe - mm (inch) | 15.9 (5/8) | 15.9 (5/8) | 15.9 (5/8) |
| Outdoor Unit | Liquid Pipe - mm (inch) | 9.52 (3/8) | 9.52 (3/8) | 9.52 (3/8) |
| | Gas Pipe - mm (inch) | 15.9 (5/8) | 15.9 (5/8) | 15.9 (5/8) |
| Indoor Unit | Liquid Pipe - mm (inch) | 9.52 (3/8) | 9.52 (3/8) | 9.52 (3/8) |
| | Gas Pipe - mm (inch) | 15.9 (5/8) | 15.9 (5/8) | 15.9 (5/8) |
| Wiring Method | | Hardwire to Outdoor | | |
| Interconnect Cables | | 2 Core + Earth | | |





actronair.com.au
1300 522 722